


1250W Ku-Band BUC/ SSPB/ SSPA Second Generation GaN Technology

SSPA	AWMAg-K	5200-SapphireBlu™ series
Ext. Ku-Band SSPA	AWMg-1250KX	
SSPB (BUC)	SSPBMg-K	5200-SapphireBlu™ series

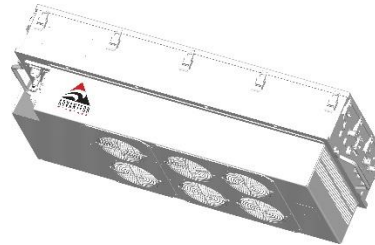


1:2 Redundant Version

UltraLinear™ SapphireBlu™

- High power density in a compact, rugged, weatherproof package
- UltraLinear™, designed for Multi Carrier Operations
- High Performance GaN Technology SSPA Outdoor design concept
- High Reliability, High Linearity, Low Energy Consumption

The Ultimate Solution for Direct to Home TV

- Save 8 to 10 dB power compared to Indoor Klystron
- Save Millions of dollars in Energy Cost, Satellite Bandwidth, CAPEX
- Can cover multiple transponders, full DVB-S2 enabled
- Rugged, Weatherproof Outdoor Package,
- MIL-STD-188-164A Compliant
- Redundant Ready, Power Expandable to 2-5 KW by phase combining

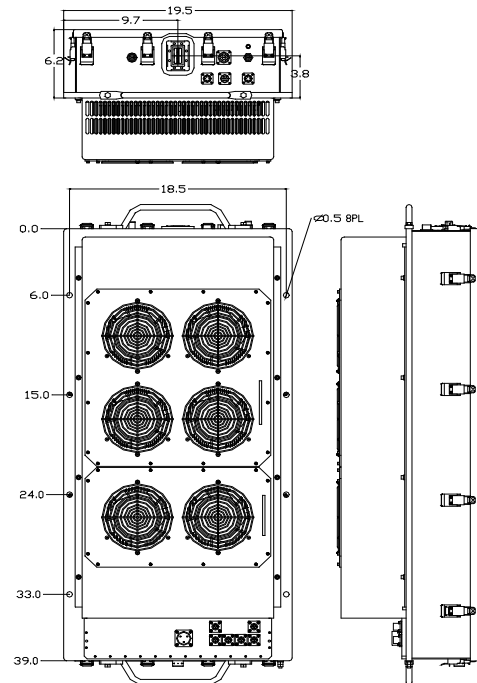

- Exceeds all barriers between Klystrons, TWTs and SSPAs
- We can now saturate all transponders of an entire satellite and obtain maximum bandwidth/power efficiency (using modular RF concept)
- 2 years warranty, due to increased GaN Technology reliability
- Backed by over 25 years of Outdoor SSPA design and manufacturing

1250W Ku-Band BUC/ SSPB/ SSPA Second Generation GaN Technology

General Specifications			
	KS /KX /KL		
Operating Frequency	14.0 – 14.5 GHz (KS)	13.75 – 14.5 GHz (KX)	12.75 – 13.25 GHz (KL)
L-Band input (BUC)	950 – 1450 MHz (KS)	950 – 1700 MHz (KX)	950 – 1450 MHz (KL)
Output Power	1250W		
PSAT, PA Module	+60.7 dBm nominal		
P _{SAT} , at Flange	+58.5 dBm nominal		
P1dB	+58.0 dBm minimum		
P _{LINEAR}	+57.0 dBm minimum		
	P _{LINEAR} is the maximum combined transmit power of two equal amplitude continuous wave (CW) carriers 5MHz apart, when the third order intermodulation product power is -25dB relative to each carrier and the spectral regrowth is <-30 dBc @ 1.0 x symbol rate for QPSK/OQPSK/8PSK modulation.		
Gain	SSPA 78 ± 3 dB	SSPB (BUC) 68 ± 3 dB	
Gain adjustment range	20 dB in 1.0 dB steps		
Gain flatness over 500 MHz	SSPA: 2 dB p-p max	SSPB (BUC): 3 dB p-p max	
Gain slope over 40 MHz	± 0.3 dB max	SSPB (BUC) ± 0.5 dB max	
Gain variation over temperature	± 1.5 dB max		
Input Impedance and VSWR	50 Ω	SSPA 1.3:1	SSPB (BUC) 1.4:1
Output VSWR	1.3:1		
Noise power density	-75 dBm/Hz in Transmit Band, -145 dBm/Hz in Receive Band (10.95 GHz – 12.75 GHz)		
Spurious at P _{LINEAR}	SSPA: -65 dBc max	SSPB (BUC): -60 dBc max	
Harmonics	-50 dBc @ P _{LINEAR}		
AM/PM conversion	<1.0°/dB P _{LINEAR}		
Third order intermod (two tones)	-25 dBc two signals 5 MHz apart at total +57 dBm P _{linear} , versus each carrier		
Group delay	Ripple	1 nsec p-p max over any 40 MHz band	
Residual AM Noise	0 – 10 kHz	-45 dBc	
	10 kHz – 500 kHz	-20 (1.25 + log F) dBc	F = Frequency in kHz
	500 kHz – 1 MHz	-80 dBc	
SSPB (BUC)			
Local Oscillator freq.	13.05 GHz (KS)	12.8 GHz (KX)	11.8 GHz (KL)
Internal Reference frequency (optional)	10 MHz	Aging/day ±2 × 10 ⁻¹⁰ Aging/year ±5 × 10 ⁻⁸ Stability ±2 × 10 ⁻⁸ over temp range	
Phase Noise	-53 dBc/Hz at 10Hz -63 dBc/Hz at 100Hz -73 dBc/Hz at 1000Hz		-83 dBc/Hz at 10 kHz -93 dBc/Hz at 100 kHz
External Reference Frequency phase noise (max)	10 MHz -120 dBc/Hz at 10Hz -135 dBc/Hz at 100Hz -150 dBc/Hz at 1000Hz		-155 dBc/Hz at 10 kHz -160 dBc/Hz at 100 kHz
Weight & Dimensions			
Dimensions	L x W x H 39.00" x 18.50" x 12.10" (990 x 470 x 307 mm)		
Weight	176 lbs (80 kg)		
AC input voltage	190 – 265 VAC (47-63 Hz)		
Power consumption	3.8KW at 46 dBm	5KW at 56 dBm	6.5KW at P _{SAT}
Interfaces	Input (RF or L-Band) Output Sample Port RS232/RS485	N type female N type female MS3102 type	AC line RF output Ethernet MS3102 type RJ45 (Weatherized)
Environmental	Temperature	Operating -30°C to +55 °C Storage -55°C to +85 °C	Option 1 -40°C to +55 °C Option 2 -50°C to +50 °C
	Humidity	100% condensing	
	Altitude	10,000' AMSL, derated by 2 °C/1000' from AMSL	

Ref.: PB-SAPPH-2G-Ku-1250W-18158

NORTH AMERICA

USA
info.usa@advantechwireless.com

CANADA
Info.canada@advantechwireless.com

EUROPE

UNITED KINGDOM
info.uk@advantechwireless.com

RUSSIA & CIS
info.russia@advantechwireless.com

SOUTH AMERICA

info.latam@advantechwireless.com

BRAZIL
info.brazil@advantechwireless.com

ASIA

info.asia@advantechwireless.com

INDIA
info.india@advantechwireless.com