
Bulletin	1492-J, -W	1492-L
Type	Screw Type Terminal Blocks	Spring-Clamp Terminal Blocks
Technology	Screw terminations are a time-proven method of wire connection. Their greatest advantage is the ability to land multiple wires to a single terminal, potentially saving panel space. Screw type blocks can often accept up to five solid or stranded wires per terminal. They also typically provide the best visual indication of the wire connection.	Compared to screw type terminations, spring clamp terminations can be a significantly faster method of connection and can often reduce wire connection time by 30...50%. Because the wire is under constant tension from the spring clamp, spring type terminations also produce very favorable results in high vibration applications.
Certifications	UR, CSA	UR, CSA
Standards Compliance	IEC, CE	IEC, CE
Product Types	<ul style="list-style-type: none"> • Mini blocks • Feed-through blocks • Multi-conductor blocks • Plug-in style blocks • Grounding blocks • Fuse blocks • Two level terminal blocks • Three-Level Sensor blocks • Electrical Component blocks • Isolation blocks 	<ul style="list-style-type: none"> • Mini blocks • Fuse blocks • Feed-through blocks • Grounding blocks • Multi-circuit blocks • Plug-in style blocks • Isolation blocks • Sensor blocks • Electrical component blocks
Product Selection	Page 12-6	Page 12-47

Certifications

Allen-Bradley terminal blocks generally have been designed to meet the requirements of one or more regulatory bodies. Most products have also been tested per additional standards. The following is a listing of some of the regulatory bodies and standards which apply to Allen-Bradley terminal block products. See the particular product description for information on specific certifications and ratings.



(Underwriters Laboratories) — Devices in this catalog with one of these ratings have been tested by Underwriters Laboratories and meet the requirements of one or more of the following United States Standards:

- UL 467 — Grounding and Bonding Equipment
- UL 486E — Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors
- UL 1059 — Standard for Terminal Blocks

Reference UL files E34648, E40735, E160646



(Underwriters Laboratories) — Devices in this catalog with this rating have been tested by Underwriters Laboratories and meet the requirements of the following Canadian Standard:

- CSA 22.2 No. 158 — Terminal Blocks

Reference UL file E40735



(Canadian Standards Association) — Devices in this catalog with this rating have been tested by the Canadian Standards Association and meet the requirements of the following Canadian Standard:

- CSA 22.2 No. 158 — Terminal Blocks

Reference CSA files LR67896



Terminal blocks listed in this catalog meet the requirements of the Low Voltage Directive put forth by the European Union. Devices have been tested and comply with one or more of the following European Norms:

- EN 60947-1 — Low Voltage Switchgear and Controlgear: General Rules
- EN 60947-7-1 — Low Voltage Switchgear and Controlgear: Terminal Blocks for Copper Conductors
- EN 60947-7-2 — Low Voltage Switchgear and Controlgear: Protective Conductor Terminal Blocks for Copper Conductors
- EN 60947-7-3 — Low Voltage Switchgear and Controlgear: Safety Requirements for Fuse Terminal Blocks



ATEX — Devices listed in this catalog with “ATEX” ratings meet the following European Norms per DEMKO or KEMA, Approval Certification Bodies for the European Union:

- EN 60079-7 — Electrical Apparatus for Potentially Explosive Atmospheres — General Requirements
- EN 60079-0 — Electrical Apparatus for Potentially Explosive Atmospheres — Increased Safety “e”

Contact your local Rockwell Automation sales office or Allen-Bradley distributor for a copy of the certificate.

Screw Connection Terminal Blocks

Certifications/Introduction

Ex e II — Many 1492-J, 1492-K, 1492-L, and 1492-W terminal blocks in this catalog meet the following Canadian Standards per Underwriters Laboratories:

CAN/CSA E 60079-7 — Electrical Apparatus for Explosive Atmospheres — Part 0 — General Requirements

CAN/CSA E 60079-0 — Electrical Apparatus for Explosive Atmospheres — Part 7 — Increased Safety “e”

These products are suitable for Class I, Zone 1 Hazardous Locations. Reference UL file E187022. Contact your local Allen-Bradley distributor for more information.

AEx e II — Devices listed in this catalog with an “AEx e II” rating meet the following United States Standard per Underwriters Laboratories:

- ANSI/UL 60079-0 and 60079-7 — Standard for Electrical Equipment for Use in Class I, Zone 0, 1, and 2 Hazardous (Classified) Locations

These products are suitable for Class I, Zone 1 Hazardous Locations. Reference UL file E187022. Contact your local Rockwell Automation sales office or Allen-Bradley distributor for more information.

Lloyd's Register — Many 1492-H, 1492-J, 1492-L, and 1492-W terminal blocks in this catalog have been certified for use in marine, off-shore, and industrial installations per the following standard:

- Lloyd's Register Test Specification No. 1:1996

Contact your local Rockwell Automation sales office or Allen-Bradley distributor for a copy of the certificate.

The Allen-Bradley Line of IEC Terminal Blocks... International Products for a Worldwide Marketplace

The Allen-Bradley Bulletin 1492-J line of internationally approved IEC style terminal blocks offers a wide range of features and benefits ideally suited for many industrial applications. The 1492-J line has been designed to meet the tough requirements of almost every industrial application. Functional, internationally approved, finger-safe, and cost-effective — the Allen-Bradley Bulletin 1492-J line.

Products Available in the Bulletin 1492 Screw Terminal Block Line

Our family of IEC terminal blocks consists of many different types of blocks, from general feed-through terminal blocks for control wiring to specialty blocks for grounding and isolating. We even offer thermocouple terminal blocks, specifically designed for temperature-dependent process control applications.

Products offered within the Bulletin 1492 Screw Terminal Block line include:

- **Feed-Through Blocks**, capable of accommodating #30...2/0 AWG (0.2...70 mm²) wire
- **Grounding Blocks** for grounding a given circuit to the DIN Rail
- **Mini Blocks** for applications where panel space is at a premium
- **Two-Level Blocks** that double circuit wiring density
- **Multi-Conductor Blocks** that allow splitting or joining of control circuits
- **Three-Level Sensor Blocks** for coordination of three-wire sensor groups
- **Isolation Blocks** for circuit isolation during testing and troubleshooting
- **Fuse Blocks**, with and without blown fuse indication, for easily integrated overcurrent protection
- **Electrical Component Blocks** that allow the insertion of fixed components into control circuits. Available components include resistors, diodes, surge suppression circuits, and shunt bars.

Screw Connection Terminal Blocks

Standard Feed-Through Blocks

	1492-J3				1492-J4				1492-J6			
Dimensions are not intended to be used for manufacturing purposes. Note: Height dimension is measured from top of rail to top of terminal block.												
Specifications	<i>Feed-through terminal block</i>				<i>Feed-through terminal block</i>				<i>Feed-through terminal block</i>			
Certifications												
Voltage Rating	600V AC/DC		800V AC/DC	550V AC/DC	600V AC/DC		800V AC/DC	690V AC/DC	600V AC/DC		800V AC/DC	550V AC/DC
Maximum Current	25 A	20 A	24 A	21 A	35 A	25 A	32 A	28 A	50 A	41 A	36 A	
Wire Range (Rated Cross Section)	#22...12 AWG	#26...12 AWG	2.5 mm ²	2.5 mm ² (#20...14 AWG)	#22...10 AWG	#26...10 AWG	4 mm ²	4 mm ² (#20...12 AWG)	#22...8 AWG	6 mm ²	6 mm ² (#20...10 AWG)	
Wire Strip Length	0.39 in. (10 mm)				0.39 in. (10 mm)				0.47 in. (12 mm)			
Recommended Tightening Torque	4.5...7.1 lb•in (0.5...0.8 N•m)				9.0 lb•in (1.0 N•m)				14.2 lb•in (1.6 N•m)			
Density	59 pcs/ft (196 pcs/m)				49 pcs/ft (163 pcs/m)				37 pcs/ft (123 pcs/m)			
Housing Temperature Range	-58...+248 °F (-50...+120 °C)				-58...+248 °F (-50...+120 °C)				-58...+248 °F (-50...+120 °C)			
Short-Circuit Current Rating	See page 12-42											
Terminal Blocks		Cat. No.	Pkg Qty.		Cat. No.	Pkg Qty.		Cat. No.	Pkg Qty.		Cat. No.	Pkg Qty.
Color:	Grey	1492-J3	100		1492-J4	100		1492-J6	100			
	Red	1492-J3-RE	100		1492-J4-RE	100		1492-J6-RE	100			
	Blue	1492-J3-B	100		1492-J4-B	100		1492-J6-B	100			
	Black	1492-J3-BL	100		1492-J4-BL	100		1492-J6-BL	100			
	Green	1492-J3-G	100		1492-J4-G	100		1492-J6-G	100			
	Yellow	1492-J3-Y	100		1492-J4-Y	100		1492-J6-Y	100			
	Orange	1492-J3-OR	100		1492-J4-OR	100		1492-J6-OR	100			
	Brown	1492-J3-BR	100		1492-J4-BR	100		1492-J6-BR	100			
	White	1492-J3-W	100		1492-J4-W	100		1492-J6-W	100			
	Violet	1492-J3-V	100		1492-J4-V	100		—	—			
Mounting Rails:												
1 m Symmetrical DIN (Steel)		199-DR1	10		199-DR1	10		199-DR1	10			10
1 m Symmetrical DIN (Aluminum)		1492-DR5	10		1492-DR5	10		1492-DR5	10			10
1 m Hi-Rise Sym. DIN (Aluminum)		1492-DR6	2		1492-DR6	2		1492-DR6	2			2
1 m Angled Hi-Rise Sym. DIN (Steel)		1492-DR7	2		1492-DR7	2		1492-DR7	2			2
End Barriers	Grey	1492-EBJ3	50		1492-EBJ3	50		1492-EBJ3	50			50
	Blue	1492-EBJ3-B	50		1492-EBJ3-B	50		1492-EBJ3-B	50			50
	Yellow	1492-EBJ3-Y	50		1492-EBJ3-Y	50		1492-EBJ3-Y	50			50
End Anchors and Retainers:												
DIN Rail — Normal Duty		1492-EAJ35	100		1492-EAJ35	100		1492-EAJ35	100			100
DIN Rail — Heavy Duty		1492-EAHJ35	50		1492-EAHJ35	50		1492-EAHJ35	50			50
Screwless End Retainer		1492-ERL35	20		1492-ERL35	20		1492-ERL35	20			20
Jumpers:*												
Screw Center Jumper — 10-pole		1492-CJJ5-10	20		1492-CJJ6-10	20		1492-CJJ8-10	20			20
Screw Center Jumper — 4-pole		1492-CJJ5-4	50		1492-CJJ6-4	50		1492-CJJ8-4	50			50
Screw Center Jumper — 3-pole		1492-CJJ5-3	50		1492-CJJ6-3	50		1492-CJJ8-3	50			50
Screw Center Jumper — 2-pole		1492-CJJ5-2	50		1492-CJJ6-2	50		1492-CJJ8-2	50			50
Plug-in Center Jumper — 50-Pole		1492-CJLJ5-50	10		1492-CJLJ6-41 (41-pole)	10		—	—			—
Plug-in Center Jumper — 10-Pole		1492-CJLJ5-10	20		1492-CJLJ6-10	20		—	—			—
Plug-in Center Jumper — 9-Pole		1492-CJLJ5-9	20		—	—		—	—			—
Plug-in Center Jumper — 8-Pole		1492-CJLJ5-8	20		—	—		—	—			—
Plug-in Center Jumper — 7-Pole		1492-CJLJ5-7	20		—	—		—	—			—
Plug-in Center Jumper — 6-Pole		1492-CJLJ5-6	20		—	—		—	—			—
Plug-in Center Jumper — 5-Pole		1492-CJLJ5-5	20		—	—		—	—			—
Plug-in Center Jumper — 4-Pole		1492-CJLJ5-4	60		1492-CJLJ6-4	60		—	—			—
Plug-in Center Jumper — 3-Pole		1492-CJLJ5-3	60		1492-CJLJ6-3	60		—	—			—
Plug-in Center Jumper — 2-Pole		1492-CJLJ5-2	60		1492-CJLJ6-2	60		—	—			—
Insulated Side Jumper — 24-Pole		1492-SJ5B-24	50		—	—		—	—			—
Insulated Side Jumper — 10-Pole		1492-SJ5B-10	50		—	—		—	—			—
Screw Type Jumper Notching Tool		1492-T1	1		1492-T1	1		1492-T1	1			1
Other Accessories:												
Partition Plate		1492-EBJ16	20		1492-EBJ16	20		1492-EBJ16	20			20
Test Plug Socket		1492-TPS23	20		1492-TPS23L	50		1492-TPS23L	50			50
Test Plug		1492-TP23	20		1492-TP23	20		1492-TP23	20			20
Test Plug (Stackable)		1492-TPJ5	25		1492-TPJ6	25		—	—			—
Electrical Warning Plate		1492-EWPJ5	25		1492-EWPJ5	25		1492-EWPJ8	50			50
Marking Systems:												
Snap-in Marker Cards		1492-M5X12 (144/card)	5		1492-M6X12 (120/card)	5		1492-MR8X12 (84/card)	5			5
		1492-M5X5 (200/card)	5		1492-M6X5 (200/card)	5		1492-M8X5 (160/card)	5			5

* Use of center jumpers may affect spacings, requiring derating of terminal blocks. See page 12-83 for details.

Screw Connection Terminal Blocks




Standard Feed-Through Blocks

1492-J10

1492-J16

1492-J35

Dimensions are not intended to be used for manufacturing purposes.
Note: Height dimension is measured from top of rail to top of terminal block.



Specifications	Feed-through terminal block				Feed-through terminal block				Feed-through terminal block				
Certifications		CSA	IEC	ATEX		CSA	IEC	ATEX		CSA	IEC	ATEX	
Voltage Rating	600V AC/DC		1000V AC/DC	550V AC/DC	600V AC/DC		1000V AC/DC	690V AC/DC	1000V AC/DC		600V AC/DC	1000V AC/DC	690V AC/DC
Maximum Current	65 A	50 A	57 A	50 A	85 A	76 A	66 A	66 A	150 A	120 A	125 A	109 A	
Wire Range (Rated Cross Section)	#18...6 AWG		10 mm ²	10 mm ² (#16...8 AWG)	#18...4 AWG		16 mm ²	16 mm ² (#16...6 AWG)	#12...1/0 AWG	#12...2 AWG	35 mm ²	35 mm ² (#14...2 AWG)	
Wire Strip Length	0.47 in. (12 mm)				0.63 in. (16 mm)				0.70 in. (18 mm)				
Recommended Tightening Torque	20.4 lb•in (2.3 N•m)				35.0 lb•in (4.0 N•m)				51.0 lb•in (5.8 N•m)				
Density	30 pcs/ft (100 pcs/m)				25 pcs/ft (83 pcs/m)				19 pcs/ft (62 pcs/m)				
Housing Temperature Range	-58...+248 °F (-50...+120 °C)				-58...+248 °F (-50...+120 °C)				-58...+248 °F (-50...+120 °C)				
Short-Circuit Current Rating	See page 12-42												

Terminal Blocks	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.
Color:						
Grey	1492-J10	50	1492-J16	50	1492-J35	40
Red	1492-J10-RE	50	1492-J16-RE	50	—	—
Blue	1492-J10-B	50	1492-J16-B	50	1492-J35-B	40
Black	1492-J10-BL	50	1492-J16-BL	50	—	—
Green	1492-J10-G	50	1492-J16-G	50	—	—
Yellow	1492-J10-Y	50	1492-J16-Y	50	1492-J35-Y	40
Orange	1492-J10-OR	50	1492-J16-OR	50	—	—
Brown	1492-J10-BR	50	1492-J16-BR	50	—	—
White	1492-J10-W	50	1492-J16-W	50	—	—
Accessories	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.
Mounting Rails:						
1 m Symmetrical DIN (Steel)	199-DR1	10	199-DR1	10	199-DR1	10
1 m Symmetrical Heavy Duty DIN (Steel, unslotted)	199-DR4	5	199-DR4	5	199-DR4	5
1 m Symmetrical DIN (Aluminum)	1492-DR5	10	1492-DR5	10	1492-DR5	10
1 m Hi-Rise Sym. DIN (Aluminum)	1492-DR6	2	1492-DR6	2	1492-DR6	2
1 m Angled Hi-Rise Sym. DIN (Steel)	1492-DR7	2	1492-DR7	2	1492-DR7	2
1 m Symmetrical Heavy Duty DIN (Copper, unslotted)	1492-DR8	5	1492-DR8	5	1492-DR8	5
1 m Symmetrical Heavy Duty DIN (Steel)	1492-DR9	5	1492-DR9	5	1492-DR9	5
End Barriers						
Grey	1492-EBJ3	50	1492-EBJ16	20	1492-EBJ16	20
Blue	1492-EBJ3-B	50	1492-EBJ16-B	20	1492-EBJ16-B	20
Yellow	1492-EBJ3-Y	50	1492-EBJ16-Y	20	1492-EBJ16-Y	20
End Anchors and Retainers:						
DIN Rail — Normal Duty	1492-EAJ35	100	—	—	—	—
DIN Rail — Heavy Duty	1492-EAHJ35	50	1492-EAHJ35	50	1492-EAHJ35	50
Screwless End Retainer	1492-ERL35	20	—	—	—	—
Jumpers:						
Screw Center Jumper — 10-pole	1492-CJJ10-10	20	1492-CJJ12-10	10	1492-CJJ16-10	10
Screw Center Jumper — 4-pole	1492-CJJ10-4	50	1492-CJJ12-4	20	1492-CJJ16-4	20
Screw Center Jumper — 3-pole	1492-CJJ10-3	50	1492-CJJ12-3	20	1492-CJJ16-3	20
Screw Center Jumper — 2-pole	1492-CJJ10-2	50	1492-CJJ12-2	20	1492-CJJ16-2	20
Screw Type Jumper Notching Tool	1492-T1	1	1492-T1	1	1492-T1	1
Other Accessories:						
Partition Plate	1492-EBJ16	20	1492-PPJD3	20	1492-PPJD3	20
Test Plug Socket	1492-TPS23L	50	1492-TPS4L	50	1492-TPS4L	50
Test Plug	1492-TP23	20	1492-TP40	20	1492-TP40	20
Electrical Warning Plate	1492-EWPJ8	50	1492-EWPJ12	50	1492-EWPJ12	50
Marking Systems:						
Snap-in marker cards	1492-M7X12 (108/card)	5	1492-M7X12 (108/card)	5	1492-M7X12 (108/card)	5
Snap-in marker cards	1492-M5X5 (200/card)	5	1492-M5X5 (200 card)	5	1492-M5X5 (200/card)	5

Screw Connection Terminal Blocks

Specialty Feed-Through Blocks

	1492-J2Q			1492-J3TW				1492-J4TW		
Dimensions are not intended to be used for manufacturing purposes. Note: Height dimension is measured from top of rail to top of terminal block.										
Specifications	Feed-through terminal block with 2 connection points on each side			Feed-through terminal block with 3 connection points, 2 on one side				Feed-through terminal block with 3 connection points, 2 on one side		
Certifications		CSA	IEC		CSA	IEC	ATEX		CSA	IEC
Voltage Rating	300V AC/DC			300V AC/DC				600V AC/DC		
Maximum Current	25 A	10 A	17.5 A	—				30 A		
Maximum Current	Single Side			10 A	15 A	17.5 A	15 A	—		
Maximum Current	Twin Side			20 A		24 A	21 A	—		
Wire Range (Rated Cross Section)	Single Side			#22...12 AWG	#26...12 AWG	2.5 mm ²	2.5 mm ² (#20...14 AWG)	#30...10 AWG		
Wire Range (Rated Cross Section)	Twin Side			—		#22...14 AWG	26...14 AWG			
Wire Strip Length	0.28 in. (7 mm)			Single Side: 0.39 in. (10 mm) Twin Side: 0.26 in. (7 mm)				0.39 in. (10 mm)		
Recommended Tightening Torque	4.5 lb•in (0.5 N•m)			Single Side: 7.0 lb•in (0.8 N•m) Twin Side: 4.5 lb•in (0.5 N•m)				6.2 lb•in (0.7 N•m)		
Density	59 pcs/ft (196 pcs/m)			59 pcs/ft (196 pcs/m)				59 pcs/ft (196 pcs/m)		
Housing Temperature Range	Insulation Temperature Range			-58...+248 °F (-50...+120 °C)				-58...+248 °F (-50...+120 °C)		
Short-Circuit Current Rating	See page 12-42									
Terminal Blocks	Terminal Blocks	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	
Color:	Grey	1492-J2Q	100	1492-J3TW	100	1492-J4TW	50			
	Red	1492-J2Q-RE	100	1492-J3TW-RE	100					
	Blue	1492-J2Q-B	100	1492-J3TW-B	100					
	Black	1492-J2Q-BL	100	1492-J3TW-BL	100					
	Green	1492-J2Q-G	100	1492-J3TW-G	100					
	Yellow	1492-J2Q-Y	100	1492-J3TW-Y	100					
	Orange	1492-J2Q-OR	100	1492-J3TW-OR	100					
	Brown	1492-J2Q-BR	100	1492-J3TW-BR	100					
	White	1492-J2Q-W	100	1492-J3TW-W	100					
Accessories		Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	
Mounting Rails:										
1 m Symmetrical DIN (Steel)		199-DR1	10	199-DR1	10	199-DR1	10			
1 m Symmetrical DIN (Aluminum)		1492-DR5	10	1492-DR5	10	1492-DR5	10			
1 m Hi-Rise Sym. DIN (Aluminum)		1492-DR6	2	1492-DR6	2	1492-DR6	2			
1 m Angled Hi-Rise Sym. DIN (Steel)		1492-DR7	2	1492-DR7	2	1492-DR7	2			
End Barriers	Grey	1492-EBJ3	50	1492-EBJ3	50	1492-EBJ4TW	50			
	Blue	1492-EBJ3-B	50	1492-EBJ3-B	50					
	Yellow	1492-EBJ3-Y	50	1492-EBJ3-Y	50	1492-EBJ4TW-Y	50			
End Anchors and Retainers:										
Screwless End Retainer		1492-ERL35	20	1492-ERL35	20	1492-ERL35	20			
DIN Rail — Normal Duty		1492-EAJ35	100	1492-EAJ35	100	1492-EAJ35	100			
DIN Rail — Heavy Duty		1492-EAH35	10	1492-EAH35	10	1492-EAH35	10			
Jumpers: *										
Screw Center Jumper — 10-pole		1492-CJJ5-10	20	1492-CJJ5-10	20					
Screw Center Jumper — 4-pole		1492-CJJ5-4	50	1492-CJJ5-4	50					
Screw Center Jumper — 3-pole		1492-CJJ5-3	50	1492-CJJ5-3	50					
Screw Center Jumper — 2-pole		1492-CJJ5-2	50	1492-CJJ5-2	50					
Plug-in Center Jumper — 50-Pole (1492-J3TW)/ 41-Pole (1492-J4TW)				1492-CJLJ5-50	10	1492-CJLJ6-41	10			
Plug-in Center Jumper — 5-, 6-, 7-, 8-, 9-, 10-Pole				1492-CJLJ5-5, -6, -7, -8, -9, -10	20	1492-CJLJ6-10	20			
Plug-in Center Jumper — 2-, 3-, 4-Pole				1492-CJLJ5-2, -3, -4	60	1492-CJLJ6-2, -3, -4	60			
Insulated Side Jumper — 24-Pole		1492-SJ5B-24	50	1492-SJ5B-24	50					
Insulated Side Jumper — 10-Pole		1492-SJ5B-10	50	1492-SJ5B-10	50					
Screw Type Jumper Notching Tool		1492-T1	1	1492-T1	1					
Other Accessories:										
Partition Plate		1492-EBJ16	20	1492-EBJ16	20					
Test Plug Socket		1492-TPS23L	50	1492-TPS23L	50	1492-TPS23L	50			
Test Plug		1492-TP23	20	1492-TP23	20	1492-TP23	20			
Test Plug (Stackable)		1492-TPJ5	25	1492-TPJ5	25					
Marking Systems:										
Snap-in marker card		1492-M5X12 (144/card)	5	1492-M5X12 (144/card)	5	1492-MR6X12 (120/card)	5			
		1492-M6X12 (200/card)	5	1492-M6X12 (200/card)	5	1492-M6X12 (120/card)	5			

* Use of center jumpers may affect spacings, requiring derating of terminal blocks.



Screw Connection Terminal Blocks

Specialty Feed-Through Blocks

	1492-W4TW			1492-WR3			1492-J4M	
Dimensions are not intended to be used for manufacturing purposes. Note: Height dimension is measured from top of rail to top of terminal block.								
	2.05" (52.1 mm)			1.78" (45.3 mm)			2.36" (60 mm)	
Specifications	Feed-through terminal block with 3 connection points, 2 on one side			Single-circuit terminal block with terminals on common side.			Motor connection terminal block cluster with 3 feeds and ground	
Certifications		CSA	IEC		CSA	IEC	Certifications on individual blocks (1492-J4, JG4)	
Voltage Rating	600V AC/DC	600V AC/DC	800V AC/DC	300V AC/DC	300V AC/DC	500V AC/DC		
Maximum Current	30 A	20 A	32 A	15 A	15 A	15 A		
Wire Range (Rated Cross Section)	#18...10 AWG	#22...12 AWG	0.5...4 mm ²	#22...14 AWG	#22...14 AWG	0.5...2.5 mm ²		
Wire Strip Length	0.35 in. (9 mm)			0.39 in. (10 mm)				
Recommended Tightening Torque	5.0...5.6 lb•in (0.6 N•m)			5.0...5.6 lb•in (0.6 N•m)			9.0 lb•in (1.0 N•m)	
Density	50 pcs/ft (166 pcs/m)			61 pcs/ft (200 pcs/m)			12 pcs/ft (40 pcs/m)	
Housing Temperature Range	-40...+195 °F (-40...+90 °C)			-40...+195 °F (-40...+90 °C)			-58...+248 °F (-50...+120 °C)	
Short-Circuit Current Rating	See page 12-42							
Terminal Blocks	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.
Color:	Grey	1492-W4TW	50	1492-WR3	50	—	—	—
	Grey/Green/Yellow	—	—	—	—	1492-J4M	20	—
	Red	1492-W4TW-RE	50	—	—	—	—	—
	Blue	1492-W4TW-B	50	—	—	—	—	—
	Black	1492-W4TW-BL	50	—	—	—	—	—
	Green	1492-W4TW-G	50	—	—	—	—	—
	Yellow	1492-W4TW-Y	50	—	—	—	—	—
	Orange	1492-W4TW-OR	50	—	—	—	—	—
	Brown	1492-W4TW-BR	50	—	—	—	—	—
	White	1492-W4TW-W	50	—	—	—	—	—
Accessories	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.
Mounting Rails:								
1 m Symmetrical DIN (Steel)	199-DR1	10	199-DR1	10	199-DR1	10	199-DR1	10
1 m Symmetrical DIN (Aluminum)	1492-DR5	10	1492-DR5	10	1492-DR5	10	1492-DR5	10
1 m Hi-Rise Sym. DIN (Aluminum)	1492-DR6	2	1492-DR6	2	1492-DR6	2	1492-DR6	2
1 m Angled Hi-Rise Sym. DIN (Steel)	1492-DR7	2	1492-DR7	2	1492-DR7	2	1492-DR7	2
End Barriers	Grey	1492-EB3TW	50	1492-EBR3	50	Not Required	—	—
End Anchors and Retainers:								
Screwless End Retainer	1492-ERL35	20	1492-ERL35	20	1492-ERL35	20	1492-ERL35	20
DIN Rail — Normal Duty	1492-EAJ35	100	1492-EAJ35	100	1492-EAJ35	100	1492-EAJ35	100
DIN Rail — Heavy Duty	1492-EAHJ35	50	1492-EAHJ35	50	1492-EAHJ35	50	1492-EAHJ35	50
Jumpers:								
Side Jumper — 10-pole insulated	1492-SJ6-10*	10	1492-SJ5-10	10	—	—	—	—
Screw Center Jumper — 50-pole	1492-CJ6-50	5	1492-CJD5-50	5	—	—	—	—
Screw Center Jumper — 10-pole	1492-CJ6-10	10	1492-CJD5-10	10	1492-CJJ6-10	20	1492-CJJ6-10	20
Screw Center Jumper — 5-pole	1492-CJ6-5	10	1492-CJD5-5	10	—	—	—	—
Screw Center Jumper — 4-pole	1492-CJ6-4	10	1492-CJD5-4	10	1492-CJJ6-4	50	1492-CJJ6-4	50
Screw Center Jumper — 3-pole	1492-CJ6-3	10	1492-CJD5-3	10	1492-CJJ6-3	50	1492-CJJ6-3	50
Screw Center Jumper — 2-pole	1492-CJ6-2	10	1492-CJD5-2	10	1492-CJJ6-2	50	1492-CJJ6-2	50
Center Jumper Cover — White†	1492-CJCW6	20	1492-CJCW5	20	—	—	—	—
Center Jumper Link	1492-CJL6	10	1492-CJL5	10	—	—	—	—
Screw Type Jumper Notching Tool	—	—	—	—	1492-T1	1	—	1
Other Accessories:								
Partition Plate	1492-PP10	50	1492-EBR3	50	1492-EBJ16	20	—	20
End Cover*	1492-EC3TW	10	—	—	—	—	—	—
Test Plug Socket	—	—	—	—	1492-TPS23L	50	—	50
Test Plug	1492-TP28	10	—	—	1492-TP23	20	—	20
Test Adapter	1492-TA40	10	1492-TA285	10	1492-TPJ6	25	—	25
Electrical Warning Plate	—	—	—	—	1492-EWPJ5	50	—	50
Marking Systems:								
Snap-in marker cards	1492-MS6X9 (80/card)	5	1492-MS5X9 (80/card)	5	1492-M6X12 (120/card)	5	—	5

* Use side jumpers on the single conductor side only.

* Provides IP2X Finger Safety when a W4 is mounted on open side of Cat. No. 1492-W4TW.

† May only be used as a marking surface. Cannot be installed over a center jumper.





Screw Connection Terminal Blocks

Stab-Connect Feed-Through

1492-J3F

1492-JD3F

Dimensions are not intended to be used for manufacturing purposes.
Note: Height dimension is measured from top of rail to top of terminal block.



Specifications	1492-J3F			1492-JD3F		
	<i>Feed-through terminal block with stab connections on one side</i>			<i>Two-level, two-circuit feed-through terminal block with stab connections on one side</i>		
Certifications	UL	CSA	IEC	UL	CSA	IEC
Voltage Rating	300V AC/DC		500V AC/DC	300V AC/DC		400V AC/DC
Maximum Current	16 A	10 A	16 A (2 x 8)	10 A		16 A (2 x 8)
Wire Range (Rated Cross Section)	#22...12 AWG	#26...12 AWG	2.5 mm ²	#22...12 AWG	#26...12 AWG	2.5 mm ²
Wire Strip Length	0.39 in. (10 mm)			0.39 in. (10 mm)		
Recommended Tightening Torque	4.5...7.1 lb•in (0.5...0.8 N•m)			4.5...7.1 lb•in (0.5...0.8 N•m)		
Density	59 pcs/ft (196 pcs/m)			59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-58...+248 °F (-50...+120 °C)			-58...+248 °F (-50...+120 °C)		
Short-Circuit Current Rating	See page 12-42					
Terminal Blocks	Cat. No.	Pkg Qty.		Cat. No.	Pkg Qty.	
Color:	Grey	1492-J3F	50	1492-JD3F	50	
Accessories	Cat. No.	Pkg Qty.		Cat. No.	Pkg Qty.	
Mounting Rails:						
1 m Symmetrical DIN (Steel)	199-DR1	10		199-DR1	10	
1 m Symmetrical DIN (Aluminum)	1492-DR5	10		1492-DR5	10	
1 m Hi-Rise Sym. DIN (Aluminum)	1492-DR6	2		1492-DR6	2	
1 m Angled Hi-Rise Sym. DIN (Steel)	1492-DR7	2		1492-DR7	2	
End Barrier	1492-EBJ3	50		1492-EBJD3	20	
End Anchors and Retainers:						
Screwless End Retainer	1492-ERL35	20		1492-ERL35	20	
DIN Rail — Normal Duty	1492-EAJ35	100		1492-EAJ35	100	
DIN Rail — Heavy Duty	1492-EAHJ35	50		1492-EAHJ35	50	
Fast-on Connector (Size 0.110 in.)	800M-NT2	100		800M-NT2	100	
Connector Insulation Sleeve	1492-FCS	100		1492-FCS	100	
Jumpers:						
Screw Center Jumper — 10-pole	1492-CJJ5-10	20		1492-CJJ5-10	20	
Screw Center Jumper — 4-pole	1492-CJJ5-4	50		1492-CJJ5-4	50	
Screw Center Jumper — 3-pole	1492-CJJ5-3	50		1492-CJJ5-3	50	
Screw Center Jumper — 2-pole	1492-CJJ5-2	50		1492-CJJ5-2	50	
Insulated Side Jumper — 24-Pole	1492-SJ5B-24	50		1492-SJ5A-24	50	
Insulated Side Jumper — 10-Pole	1492-SJ5B-10	50		1492-SJ5A-10	50	
Screw Type Jumper Notching Tool	1492-T1	1		1492-T1	1	
Other Accessories:						
Partition Plate	1492-EBJ16	20		1492-PPJD3	20	
Marking Systems:						
Snap-in marker cards	1492-M5X12 (144/card)	5		1492-M5X8 (144/card)	5	
Snap-in marker cards	1492-M5X5 (200/card)	5		1492-M5X5 (200/card)	5	

Screw Connection Terminal Blocks

Isolation Blocks

	1492-JKD3			1492-JKD3TP			1492-JKD4		
Dimensions are not intended to be used for manufacturing purposes. Note: Height dimension is measured from top of rail to top of terminal block.									
Specifications	Feed through terminal block with knife disconnect			Feed-through terminal block with knife disconnect and test screws			Feed-through terminal block with knife disconnect		
Certifications		CSA	IEC		CSA	IEC		CSA	IEC
Voltage Rating	300V AC/DC		500V AC/DC	300V AC/DC		500V AC/DC	600V AC/DC	300V AC/DC	400V AC/DC
Maximum Current	10 A		24 A	10 A		24 A	22 A	10 A	32 A
Wire Range (Rated Cross Section)	#22...12 AWG		2.5 mm ²	#22...12 AWG		2.5 mm ²	#22...10 AWG		0.05...4.0 mm ²
Fuse Size (Dummy Fuse Supplied)	—			—			—		
Wire Strip Length	0.39 in. (10 mm)			0.39 in. (10 mm)			0.512 in. (13 mm)		
Recommended Tightening Torque	7.1 lb•in. (0.8 N•m)			7.1 lb•in. (0.8 N•m)			9.0 lb•in. (1.0 N•m)		
Density	49 pcs/ft (163 pcs/m)			49 pcs/ft (163 pcs/m)			49 pcs/ft (163 pcs/m)		
Housing Temperature Range	-58...+248 °F (-50...+120 °C)			-58...+248 °F (-50...+120 °C)			-58...+248 °F (-50...+120 °C)		
Short-Circuit Current Rating	See page 12-42								
Terminal Blocks	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.
Color:	Grey	1492-JKD3	100	1492-JKD3TP	100	1492-JKD4	100		
	Blue	1492-JKD3-B	100	—	—	1492-JKD4-B	100		
with Test Points	Grey	—	—	—	—	1492-JKD4TP	100		
Accessories	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.
Mounting Rails:									
1 m Symmetrical DIN (Steel)	199-DR1	10	199-DR1	10	199-DR1	10			
1 m Symmetrical DIN (Aluminum)	1492-DR5	10	1492-DR5	10	1492-DR5	10			
1 m Hi-Rise Sym. DIN (Aluminum)	1492-DR6	2	1492-DR6	2	1492-DR6	2			
1 m Angled Hi-Rise Sym. DIN (Steel)	1492-DR7	2	1492-DR7	2	1492-DR7	2			
End Barriers	Grey	1492-EBJ3	50	1492-EBJ3	50	1492-EBJ3	50		
	Yellow	—	—	—	—	1492-EBJ3-Y	50		
End Anchors:									
Screwless End Retainer	1492-ERL35	20	1492-ERL35	20	1492-ERL35	20			
DIN Rail — Normal Duty	1492-EAJ35	100	1492-EAJ35	100	1492-EAJ35	100			
DIN Rail — Heavy Duty	1492-EAHJ35	50	1492-EAHJ35	50	1492-EAHJ35	50			
Jumpers:									
Plug-in Center Jumper — 50-Pole	1492-CJLJ5-50	10	1492-CJLJ5-50	10	—	—			
Plug-in Center Jumper — 41-Pole	—	—	—	—	1492-CJLJ6-41	10			
Plug-in Center Jumper — 10-Pole	1492-CJLJ5-10	20	1492-CJLJ5-10	20	1492-CJLJ6-10	20			
Plug-in Center Jumper — 9-Pole	1492-CJLJ5-9	20	1492-CJLJ5-9	20	—	—			
Plug-in Center Jumper — 8-Pole	1492-CJLJ5-8	20	1492-CJLJ5-8	20	—	—			
Plug-in Center Jumper — 7-Pole	1492-CJLJ5-7	20	1492-CJLJ5-7	20	—	—			
Plug-in Center Jumper — 6-Pole	1492-CJLJ5-6	20	1492-CJLJ5-6	20	—	—			
Plug-in Center Jumper — 5-Pole	1492-CJLJ5-5	20	1492-CJLJ5-5	20	—	—			
Plug-in Center Jumper — 4-Pole	1492-CJLJ5-4	60	1492-CJLJ5-4	60	1492-CJLJ6-4	60			
Plug-in Center Jumper — 3-Pole	1492-CJLJ5-3	60	1492-CJLJ5-3	60	1492-CJLJ6-3	60			
Plug-in Center Jumper — 2-Pole	1492-CJLJ5-2	60	1492-CJLJ5-2	60	1492-CJLJ6-2	60			
Insulated Side Jumper — 24-Pole	1492-SJ5B-24	50	1492-SJ5B-24	50	—	—			
Insulated Side Jumper — 10-Pole	1492-SJ5B-10	50	1492-SJ5B-10	50	—	—			
Uninsulated Side Jumper — 10-Pole	—	—	—	—	—	—			
Side Jumper — Insulating Sleeve	—	—	—	—	—	—			
Screw Type Jumper Notching Tool	1492-T1	1	1492-T1	1	—	—			
Other Accessories:									
Partition Plate	1492-EBJ16	20	1492-EBJ16	20	1492-EBJ16	20			
Test Plug	—	—	1492-TP23	20	—	—			
Marking Systems:									
Snap-in marker cards	1492-M5X12 (144/card)	5	1492-M5X12 (144/card)	5	1492-MR6X12 (120/card)	5			
Snap-in marker cards	1492-M5X5 (200/card)	5	1492-M5X5 (200/card)	5	1492-M6X12 (120/card)	5			

Screw Connection Terminal Blocks

Plug-In Style Terminal Blocks

	1492-J3P			1492-J3PTP			1492-JD3P		
Dimensions are not intended to be used for manufacturing purposes. Note: Height dimension is measured from top of rail to top of terminal block.									
Specifications	Selectable component plug-in terminal block			Selectable component plug-in terminal block with test plug socket			Two Circuit selectable component plug-in terminal block		
Certifications		CSA	IEC		CSA	IEC		CSA	IEC
Voltage Rating	600V AC/DC	300V AC/DC	500V AC/DC	300V AC/DC		500V AC/DC	300V AC/DC		500V AC/DC
Maximum Current	20 A	10 A	24 A	20 A	10 A	24 A	20 A	24 A	
Wire Range (Rated Cross Section)	#30...12 AWG		2.5 mm ²	#30...12 AWG		2.5 mm ²	#24...12 AWG	#30...12 AWG	2.5 mm ²
Wire Strip Length	0.39 in. (10 mm)			0.39 in. (10 mm)			0.31 in. (8 mm)		
Recommended Tightening Torque	4.4 lb•in (0.5 N•m)			4.4 lb•in (0.5 N•m)			4.4 lb•in (0.5 N•m)		
Density	59 pcs/ft (196 pcs/m)			59 pcs/ft (196 pcs/m)			59 pcs/ft (196 pcs/m)		
Housing Temperature Range	-58...+248 °F (-50...+120 °C)			-58...+248 °F (-50...+120 °C)			-58...+248 °F (-50...+120 °C)		
Short-Circuit Current Rating	See page 12-42								
Terminal Blocks		Cat. No.	Pkg Qty.		Cat. No.	Pkg Qty.		Cat. No.	Pkg Qty.
Color:	Grey	1492-J3P	100		1492-J3PTP	100		1492-JD3P	50
	Red	1492-J3P-RE	100		—	—		—	—
Accessories		Cat. No.	Pkg Qty.		Cat. No.	Pkg Qty.		Cat. No.	Pkg Qty.
Mounting Rails:									
1 m Symmetrical DIN (Steel)		199-DR1	10		199-DR1	10		199-DR1	10
1 m Symmetrical DIN (Aluminum)		1492-DR5	10		1492-DR5	10		1492-DR5	10
1 m Hi-Rise Sym. DIN (Aluminum)		1492-DR6	2		1492-DR6	2		1492-DR6	2
1 m Angled Hi-Rise Sym. DIN (Steel)		1492-DR7	2		1492-DR7	2		1492-DR7	2
End Barriers		1492-EBJ3	50		1492-EBJ3	50		1492-EBJD3P	20
End Anchors and Retainers:		1492-ERL35	20		1492-ERL35	20		1492-ERL35	20
Screwless End Retainer									
DIN Rail — Normal Duty		1492-EAJ35	100		1492-EAJ35	100		1492-EAJ35	100
DIN Rail — Heavy Duty		1492-EAHJ35	50		1492-EAHJ35	50		1492-EAHJ35	50
Jumpers* †:		1492-CJLJ5-50	10		1492-CJLJ5-50	10		—	—
Center Jumper — 50-Pole									
Center Jumper — 10-Pole		1492-CJLJ5-10	20		1492-CJLJ5-10	20		1492-CJJ5-10	20
Center Jumper — 9-Pole		1492-CJLJ5-9	20		1492-CJLJ5-9	20		—	—
Center Jumper — 8-Pole		1492-CJLJ5-8	20		1492-CJLJ5-8	20		—	—
Center Jumper — 7-Pole		1492-CJLJ5-7	20		1492-CJLJ5-7	20		—	—
Center Jumper — 6-Pole		1492-CJLJ5-6	20		1492-CJLJ5-6	20		—	—
Center Jumper — 5-Pole		1492-CJLJ5-5	20		1492-CJLJ5-5	20		—	—
Center Jumper — 4-Pole		1492-CJLJ5-4	60		1492-CJLJ5-4	60		1492-CJJ5-4	50
Center Jumper — 3-Pole		1492-CJLJ5-3	60		1492-CJLJ5-3	60		1492-CJJ5-3	50
Center Jumper — 2-Pole		1492-CJLJ5-2	60		1492-CJLJ5-2	60		1492-CJJ5-2	50
Screw Type Jumper Notching Tool		—	—		—	—		1492-T1	1
Other Accessories:		1492-EBJ16	20		1492-EBJ16	20		1492-PPJD3P	20
Partition Plate									
Test Plug		—	—		1492-TP23	20		—	—
Disconnect Plug		1492-DPL	50		1492-DPL	50		1492-DPL	50
Component Plug		1492-CPL	50		1492-CPL	50		1492-CPL	50
Fuse Plug		1492-FPK2	20		1492-FPK2	20		1492-FPK2	20
Without Blown Fuse Indicator									
10...36V Blown Fuse Indicator		1492-FPK224	20		1492-FPK224	20		1492-FPK224	20
35...70V Blown Fuse Indicator		1492-FPK248	20		1492-FPK248	20		1492-FPK248	20
60...150V Blown Fuse Indicator		1492-FPK2120	20		1492-FPK2120	20		1492-FPK2120	20
140...250V Blown Fuse Indicator		1492-FPK2250	20		1492-FPK2250	20		1492-FPK2250	20
Marking Systems:		1492-M5X12 (144/card)	5		1492-M5X12 (144/card)	5		1492-SM5X10 (144/card)	5
Snap-in marker cards									
Snap-in marker cards		1492-M5X5 (200/card)	5		1492-M5X5 (200/card)	5		1492-M5X5 (200/card)	5

* Cat. nos. 1492-J3P and J3PTP use screwless center jumpers. Cat. No. 1492-JD3P uses a screw-type center jumper.

† Use of Center Jumpers may affect spacings, requiring derating of terminal blocks. See the Terminal Block selection guide, pub. no. 1492-SG008*.




Screw Connection Terminal Blocks

Thermocouple Blocks

1492-JTC3...

Dimensions are not intended to be used for manufacturing purposes.

Note: Height dimension is measured from top of rail to top of terminal block.



Specifications	<i>Two circuit terminal block with current bars made of thermocouple material</i>	
Certifications	IEC	ATEX
Voltage Rating	—	55V AC/DC
Wire Range (Rated Cross Section)	#30...12 AWG 2.5 mm ²	#20...14 AWG 2.5 mm ²
Wire Strip Length	0.39 in. (10 mm)	
Recommended Tightening Torque	3.5...5.3 lb•in (0.4...0.6 N•m)	
Density	29 pcs/ft (98 pcs/m)	
Housing Temperature Range	-58...+248 °F (-50...+120 °C)	
Short-Circuit Current Rating	See page 12-42	

Terminal Blocks	Cat. No.	Pkg Qty.
Color/Type/Material		
Gray/Type B/1 S-Copper, 1 E-Copper	1492-JTC3B	50
Gray/Type E/1 Chromel, 1 Constantan	1492-JTC3E	50
Gray/Type J/1 Iron, 1 Constantan	1492-JTC3J	50
Gray/Type K/1 Chromel, 1 Alumel	1492-JTC3K	50
Gray/Type N/1 Ni-Cr-Si, 1 Ni-Si-Mg	1492-JTC3N	50
Gray/Type S/1 E-Copper, 1 A-Copper	1492-JTC3S	50
Gray/Type T/1 E-Copper, 1 Constantan	1492-JTC3T	50

Accessories	Cat. No.	Pkg Qty.
Mounting Rails:		
1 m Symmetrical DIN (Steel)	199-DR1	10
1 m Symmetrical DIN (Aluminum)	1492-DR5	10
1 m Hi-Rise Sym. DIN (Aluminum)	1492-DR6	2
1 m Angled Hi-Rise Sym. DIN (Steel)	1492-DR7	2
End Barrier	1492-EBJ3	50
End Anchors and Retainers:		
Screwless End Retainer	1492-ERL35	20
DIN Rail — Normal Duty	1492-EAJ35	100
DIN Rail — Heavy Duty	1492-EAHJ35	50
Other Accessories:		
Partition Plate	1492-EBJ16	20
Marking Systems:		
Snap-in marker cards	1492-M5X12 (144/card)	5
Individual Marker Tabs (Single Char.)	1492-M5X5 (200/card)	5




IEC Terminal Block Accessories

Partition and Separation Plates

Partition Plates and Separation Plates

Partition plates allow visual and electrical separation of terminal groups and provide the necessary electrical spacing between adjacent insulated jumpers or between exposed ends of cut jumpers.

Separation plates consist of flexible thermoplastic material and are used between terminal blocks to isolate adjacent center jumpers both visually and electrically.

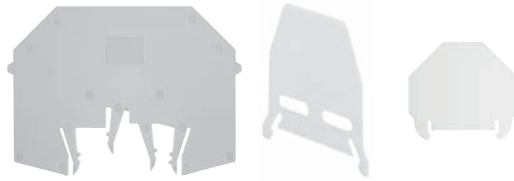

Dimensions Width x Length x Height	For Use With	Color	Pkg Qty.	Cat. No.
Partition Plates				
0.118 x 3.15 x 2.48 in. (3 x 80 x 63 mm)	1492-JD3, JD3C, JD3F, JD3DF, JD3DR, JD3RC..., JD3SS	Grey	20	1492-PPJD3
0.005 x 3.54 x 2.51 in. (0.13 x 90.1 x 63.8 mm)	1492-JD3P..., JDG3P...	Beige	20	1492-PPJD3P
0.08 x 1.57 x 1.20 in. (2 x 40 x 30.5 mm)	1492-WM3, WM4, WMG3, WMG4	Grey	50	1492-PPM3
0.014 x 2.28 x 1.51 in. (0.35 x 58 x 38.3 mm)	1492-WMD1	Grey	50	1492-PPMD1
0.06 x 1.85 x 1.57 in. (1.5 x 47 x 40 mm)	1492-W3, W4, WG4	Grey	50	1492-PP3
0.06 x 2.17 x 1.81 in. (1.5 x 55 x 46 mm)	1492-W6, W10, W16S, W4TW, WG6, WG10S, WG16S	Grey	50	1492-PP10
0.014 x 2.88 x 1.85 in. (0.35 x 73.2 x 47.1 mm)	1492-WTF3..., WTS3...	Beige	50	1492-PPTS3
0.06 x 1.93 x 2.36 in. (1.5 x 49 x 60 mm)	1492-J3, J4, J6, J10, J2Q, J3TW, J3F, JG2Q, JG3, JG3TW, JKD3, JKD3TP, J3P, J3PTP, JTC3	Grey	20	1492-EBJ16
		Blue	20	1492-EBJ16-B
		Yellow	20	1492-EBJ16-Y
Separation Plates				
.014 x 1.76 x 1.57 in. (0.35 x 44.8 x 40.0 mm)	1492-W3, W4	Beige	50	1492-SP3
	All 1492-FPK2 Fuse Plugs	Beige	50	1492-SPJ3